

The image shows four black, cylindrical bollards of increasing height from left to right, installed on a paved plaza. Each bollard has a white band near the top with three red indicator lights. The background features modern glass-fronted buildings under a blue sky with clouds.

# JS-SERIES BOLLARDS


NEW HIGH  
SECURITY RANGE

**FAAC**  
*Simply automatic.*



# JS-series bollards: protection in all situations

---

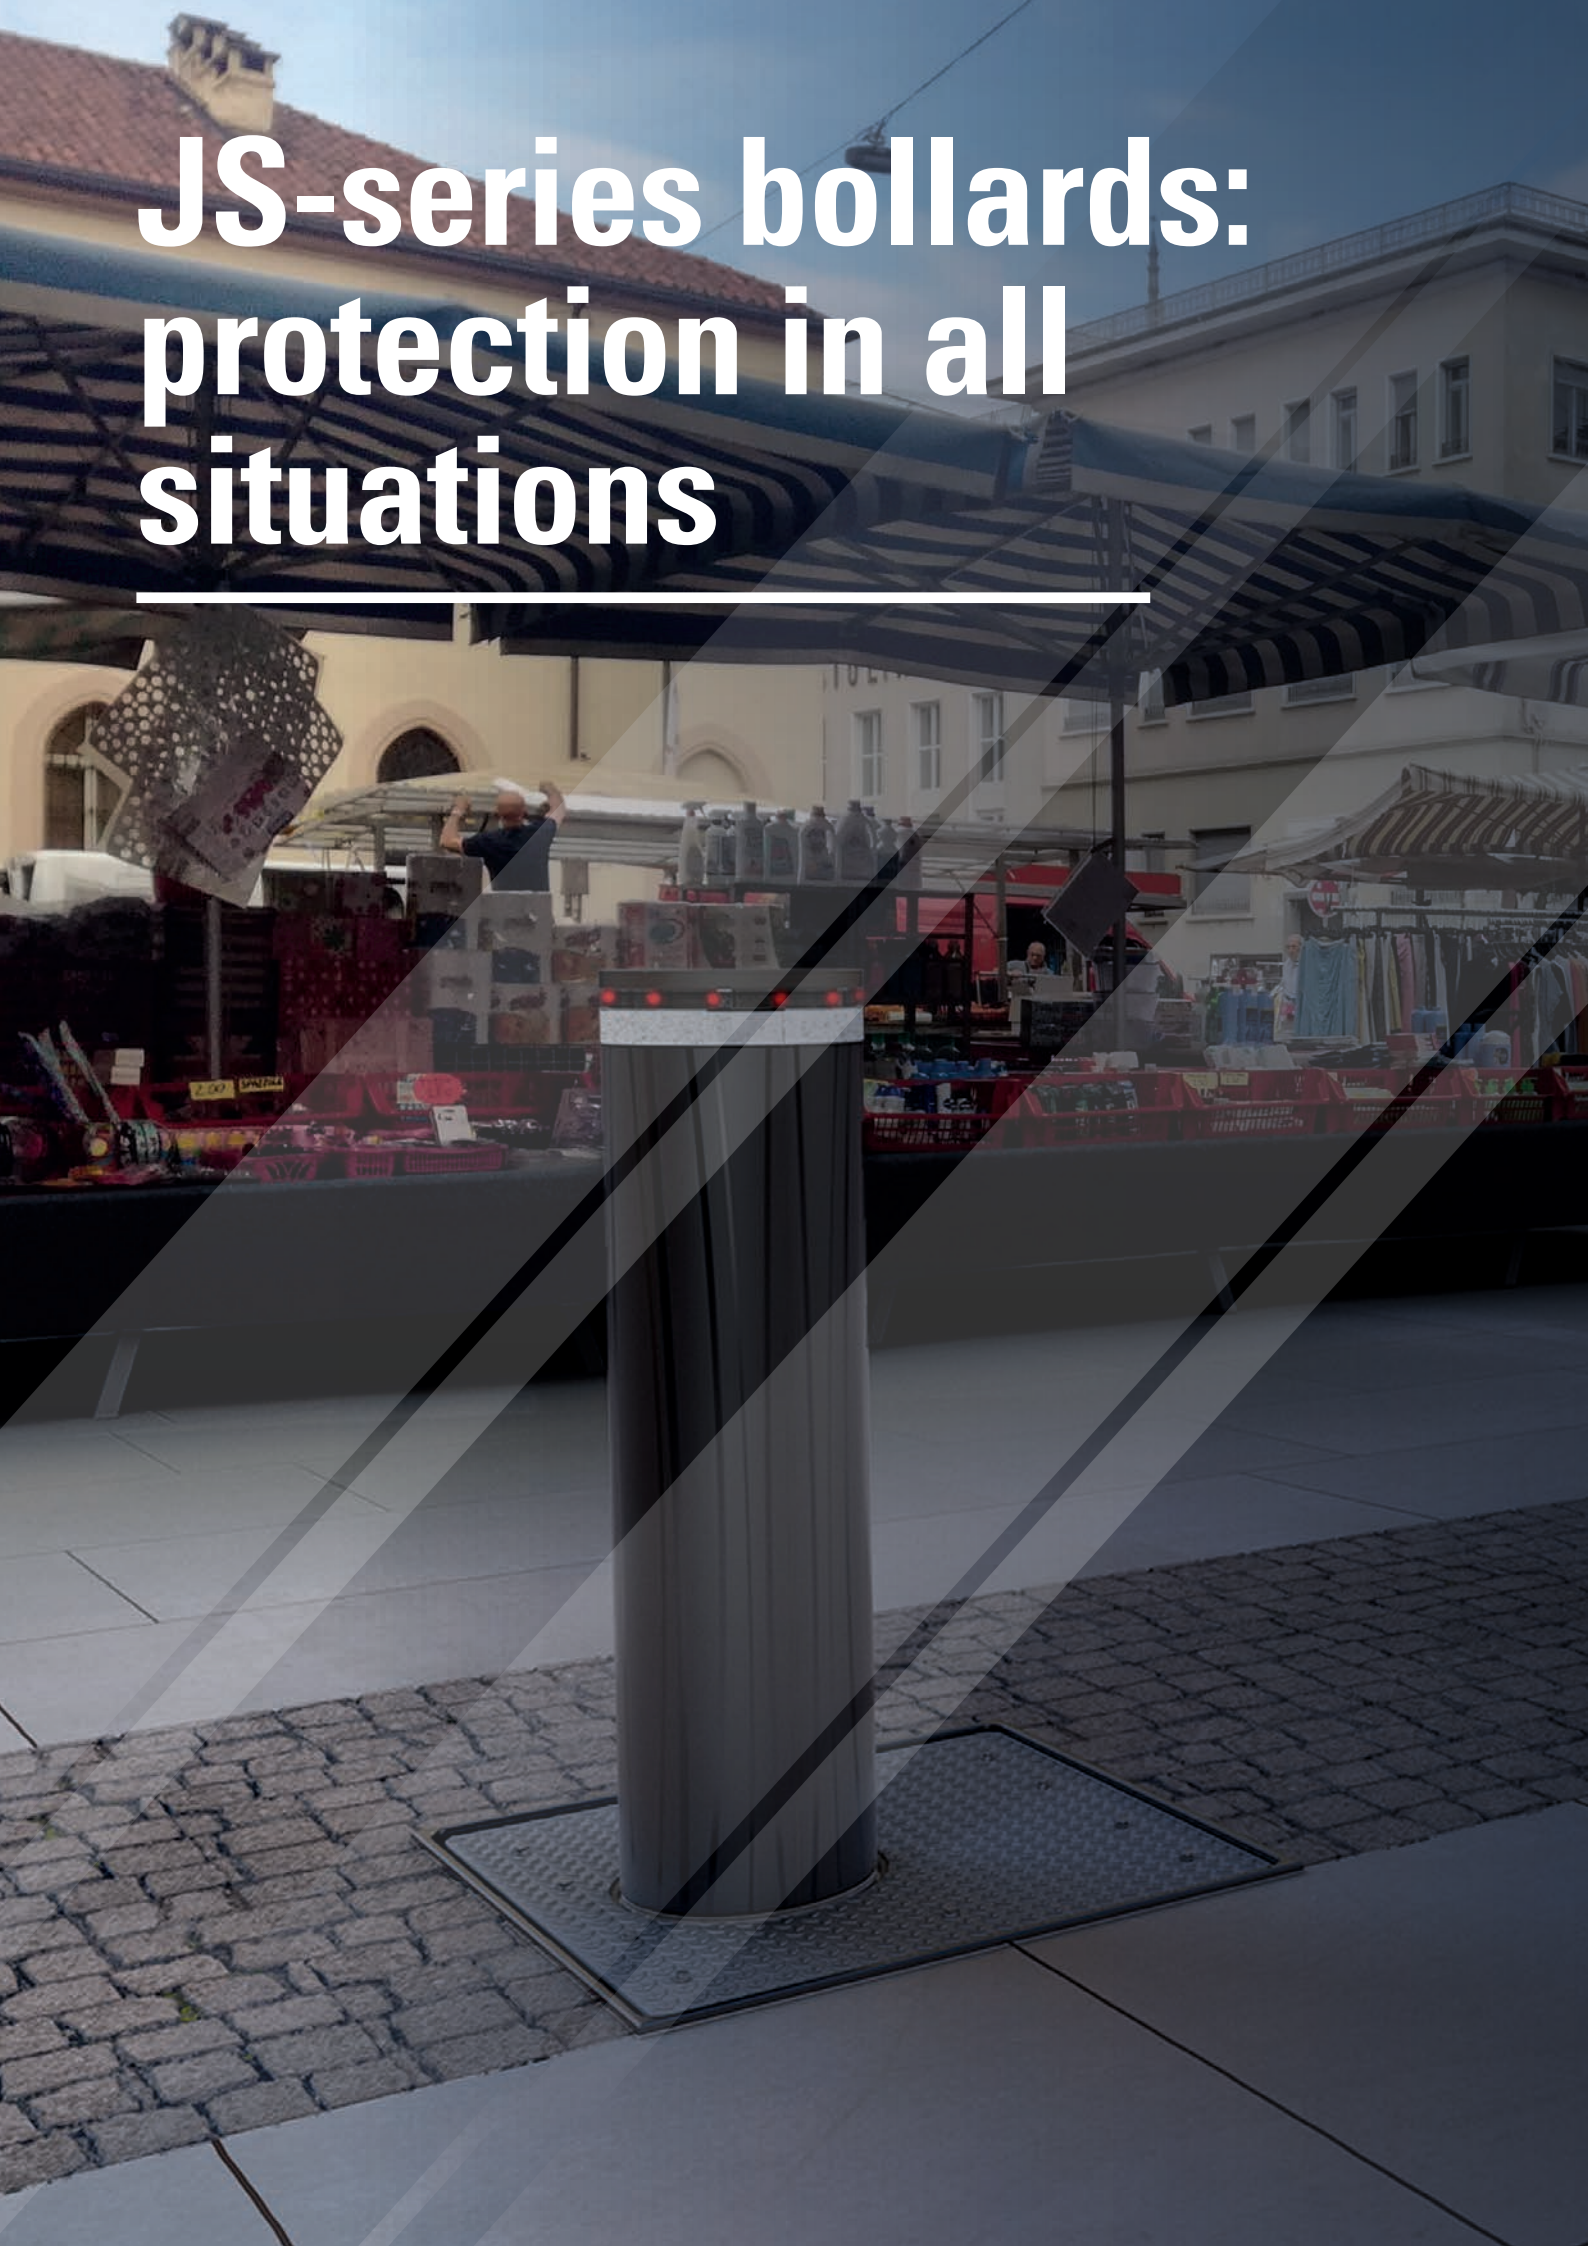



## Bollard applications

The bollard is a device commonly used to regulate road traffic or vehicle parking.

They have several functions: from controlling and limiting access to public and private areas, to restricting specific areas such as parks, pedestrian zones, etc., to providing real indestructible protection for sensitive areas such as banks, showrooms, luxury shops, or other perimeters.

## FAAC's answer

The FAAC JS-series bollards were conceived with the purpose of maximising safety in all areas that may be threatened by vehicles. JS bollards provide an innovative answer to protecting sensitive buildings, squares, markets, pedestrian areas and places with high traffic.

Non-invasive safety, able not only to protect spaces and people, but also the aesthetics of the surrounding architectural context.



Sectional view of a complete system consisting of bollard, housing pit and reinforced foundation.

JS bollards are made of high-strength steel and can be provided with customisable and interchangeable covers (FAAC patent).

JS bollards are tested according to the main international standards to withstand impact with a 7,500 kg truck driven at 50 km/h (JS 48) or 80 km/h (JS 80).



# Safer technology easier installation



## A bollard always just like new

JS bollards are provided with **protective covers mDure®**, the patented FAAC system which, unlike other bollards on the market, allows the bollard to be reconditioned avoiding high disassembly and reassembly costs.

### mDure®

is a registered FAAC trademark. It is an innovative and technological material, the result of extensive research and experience, designed to last over time.

It has an  
extremely high  
mechanical  
resistance

Resistant to shocks  
and scratches, the  
effects of chemicals,  
corrosive agents, or  
UV radiation

Does not  
pollute and  
can be  
recycled





## Certified resistance

Crash tests passed perfectly:  
JS bollards are certified to **stop a 7,500 kg truck driven at 50 km/h (JS48) and 80 km/h (JS80)**, certified operation even after impact.

Safety standards complied with:

PAS 68

ASTM  
F2656

IWA 14-1



*Watch the crash tests!*



[vimeo.com/faacgroup/js48-en](https://vimeo.com/faacgroup/js48-en)



[vimeo.com/faacgroup/js80-en](https://vimeo.com/faacgroup/js80-en)



## Corrosion resistance

Innovative use of Rilsan® anti-corrosive polyamide resin which guarantees protection from corrosion/deterioration, weather and chemical agents.



## Aesthetic consistency among all FAAC bollards

All JS technology bollards are 1m in height and 275mm diameter: these are the FAAC safety measures of all bollards, suitable to every architectural context.



## Easy maintenance

The components' arrangement facilitates maintenance operations. The main components are accessible from above for inspection or replacement without having to remove the bollard from the ground.



## Simplified installation

The integrated hydraulic power unit reduces costs and facilitates installation operations without having to lay hydraulic lines underground.

# JS bollard range: for every need, play it safe

JS bollards consist of a high-strength steel cylinder and interchangeable protective cover available in two versions:

- mDure® with exclusive FAAC design
- mDure® and Aisi 316 satin-finish stainless steel

The JS range includes the following models:

**Automatic (HA):** retractable bollard operated by FAAC hydraulic power unit. Rise time 2 seconds and descent time 6 seconds.

**Automatic EFO (HA EFO):** retractable bollard equipped with a system that, in case of emergency, allows the bollard to rise quickly in 1.5 seconds (Emergency Fast Operation).

**Fixed (F):** non-retractable bollard.

**Removable (R):** non-retractable bollard with cylinder that can be removed to temporarily allow access.

MODEL	VEHICLE SPEED AT WHICH THE BOLLARD CAN STOP IT	
	50 Km/h	80 Km/h
HA hydraulic, automatic, retractable	JS 48HA	JS 80HA
HA hydraulic, automatic, retractable with EFO system	JS 48 HA EFO	JS 80 HA EFO
F fixed		JS 80 F
R removable	JS 48 R	JS 80 R

## DIMENSIONS



Diameter 275 mm  
Height 1.000 mm

## CYLINDER MATERIAL



Steel

## PROTECTIVE COVER



mDure® with exclusive FAAC design  
mDure® and Aisi 316 satin-finish stainless steel

## AMBIENT OPERATING TEMPERATURE



-15°C ÷ +55°C

## AMBIENT OPERATING TEMPERATURE WITH HEATER



-40°C ÷ +55°C

For all specific technical information please contact us filling the form at:  
<https://info.faacbollard.com>

## HEADQUARTERS

### ITALY

FAAC S.p.A. - Soc. Unipersonale  
Via Calari 10 - 40069 Zola Predosa (BO)  
Tel. +39 051 61724 - Fax +39 051 758518  
it.info@faacgroup.com - www.faacgroup.com

## SUBSIDIARIES

### ASIA - PACIFIC

FAAC MALAYSIA  
Selangor, Malaysia  
tel. +60 3 5123 0033  
www.faac.international

### AUSTRALIA

FAAC AUSTRALIA PTY LTD  
Homebush – Sydney, Australia  
tel. +61 2 87565644  
www.faac.com.au

### AUSTRIA

FAAC GMBH  
Salzburg, Austria  
tel. +43 662 85333950  
www.faac.at

FAAC BV - TUBULAR MOTORS  
Doetinchem, The Netherlands  
tel. +49 30 5679 6645  
faacbv.info@faacgroup.com  
www.faac-tubularmotors.com

### BENELUX

FAAC BENELUX NV/SA  
Brugge, Belgium  
tel. +32 50 320202  
www.faacbenelux.com

FAAC BV  
Doetinchem, The Netherlands  
tel. +31 314 369911  
faacbv.info@faacgroup.com  
www.faacbv.com

### BRAZIL

INDÚSTRIAS ROSSI ELETROMECAÂNICA SA  
Brasília DF, Brazil  
tel. +55 61 33998787  
www.rossiportoes.com.br

### CHINA

FAAC SHANGHAI  
Shanghai, China  
tel. +86 21 68182970  
www.faacgroup.cn

### FRANCE

FAAC FRANCE  
Saint Priest - Lyon, France  
tel. +33 4 72213020  
www.faac.fr

FAAC FRANCE - AGENCE PARIS  
Massy - Paris, France  
tel. +33 4 72213020  
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOILETS  
Saint Denis de Pile - Bordeaux, France  
tel. +33 5 57551890  
www.faac.fr

### GERMANY

FAAC GMBH  
Freilassing, Germany  
tel. +49 8654 49810  
www.faac.de

FAAC BV - TUBULAR MOTORS  
Doetinchem, The Netherlands  
tel. +49 30 5679 6645  
faacbv.info@faacgroup.com  
www.faac-tubularmotors.com

### INDIA

FAAC INDIA PVT. LTD  
Noida – Delhi, India  
tel. +91 120 3934100/4199  
www.faacindia.com

### IRELAND

NATIONAL AUTOMATION LTD  
Co. Roscommon, Ireland  
tel. +353 71 9663893  
www.nal.ie

### MIDDLE EAST

FAAC MIDDLE EAST FZE  
Dubai Silicon Oasis Operation Center - Dubai, UAE  
tel. + 971 4 3724190  
www.faac.ae

### POLAND

FAAC POLSKA SP. Z O.O  
Warszawa, Poland  
tel. +48 22 8141422  
fax +48 22 8142024  
www.faac.pl

### RUSSIA

FAAC RUSSIA  
Moscow, Russia  
tel. +7 (495) 646 24 29  
www.faac.ru

### SCANDINAVIA

FAAC NORDIC AB  
Perstorp, Sweden  
tel. +46 435 779500  
www.faac.se

### SOUTH AFRICA

CENTURION SYSTEMS PTY LTD  
2162 Johannesburg  
tel. +27 11 699 2400  
www.centsys.co.za

### SPAIN

CLEM, S.A.U.  
San Sebastián de los Reyes - Madrid, Spain  
tel. +34 91 3581110  
www.faac.es

### SWITZERLAND

FAAC AG  
Altdorf, Switzerland  
tel. +41 41 8713440  
www.faac.ch

### TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ  
SAN. VE TİC. LTD. ŞİRKETİ  
İstanbul, Turkey  
tel. +90 (0)212 - 3431311  
www.faac.com.tr

### UNITED KINGDOM

FAAC UK LTD.  
Basingstoke Hampshire, UK  
tel. +44 1256 318100  
www.faac.co.uk

### U.S.A.

FAAC INTERNATIONAL INC  
Rockledge, FL - U.S.A.  
tel. +1 866 925 3222  
www.faacusa.com

FAAC INTERNATIONAL INC  
Fullerton, California - U.S.A.  
tel. +1 714 446 9800  
www.faacusa.com

**FAAC**  
*Simply automatic.*

FAAC S.p.A. - Soc. Unipersonale  
Via Calari 10 - 40069 Zola Predosa (BO)  
Tel. +39 051 61724 - Fax +39 051 758518  
it.info@faacgroup.com - www.faac.it

