

D3 SMART / D5-EVO SMART / D6 SMART THEFT-DETERRENT CAGE SUPPORT BRACKETS INSTALLATION



Images may vary according to the SMART Operator.

For new installations, remove the Operator Cover, Charger, and Lower Battery Tray.

For existing installations, remove the Operator Cover, battery(ies), charger, and Lower Battery Tray.

Place these parts in a safe place where they will not get damaged.

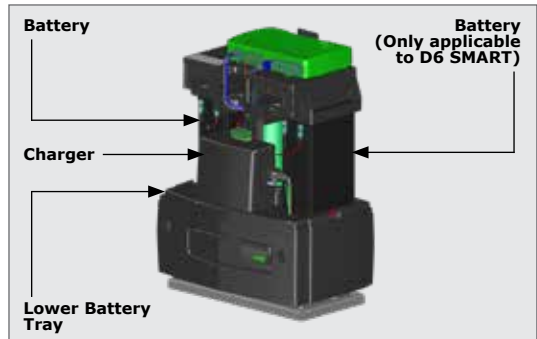


FIGURE 1

For existing installations, remove the three lock nuts, spring washers, and Top Height Adjusters, and Earth Lug.



For new installations, install the Operator as per instructions in its installation manual, up to section "**Placing the Spring Washers and Lock Nuts**" before continuing.

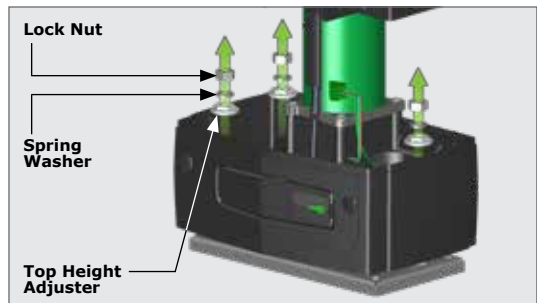


FIGURE 2

The three Theft-deterrent Support Brackets come attached to one another by means of small tabs. Bend the Support Brackets to break the tabs and split the three Support Brackets apart.

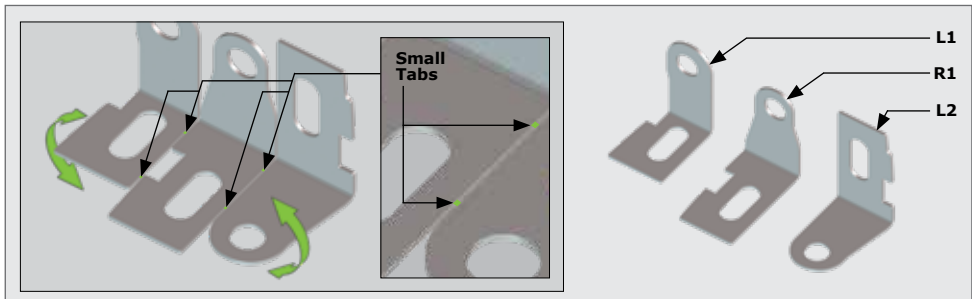


FIGURE 3

Each of the three support brackets differ from one another, locating in its unique position inside of the gearbox. Refer to Figure 4 for their positions and footprints.

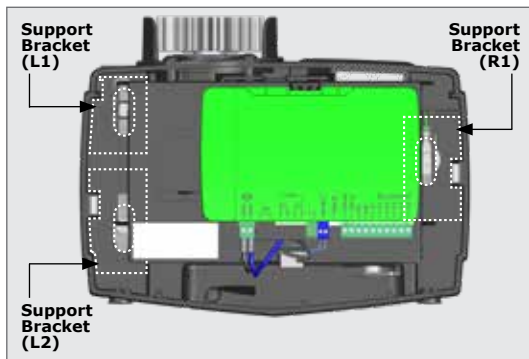


FIGURE 4

Place the three support brackets into the Gearbox as shown in Figure 5.

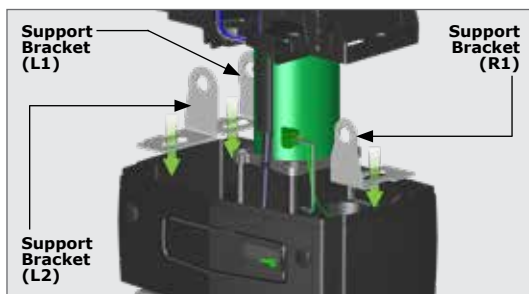


FIGURE 5

Place the three lock nuts, spring washers, Top Height Adjusters, and Earth Lug back into position.

Reassemble the Gate Operator and complete its installation as per the Operator's Installation Manual.

Once the installation of the Operator is complete, place the Operator's Cover in position, and continue with the Theft-Deterrent Cage Installation as per its Installation Manual.

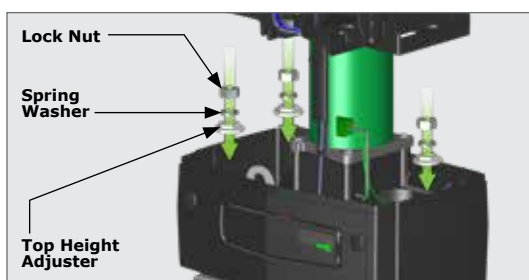


FIGURE 6



Scan the QR Code to access installation manuals online through our SMART portal.