

G-SPEAK ULTRA QUICK GUIDE



G-SPEAK ULTRA)))



Company Profile




**In-house
R&D
development
team**

**Manufactures to
international
quality standard
ISO 9001:2015**



**After-sales
multi-language
Technical Support**

**100%
testing of
products**

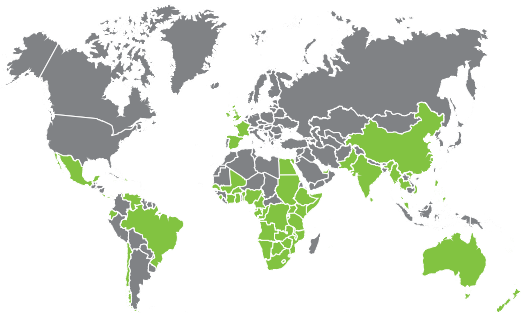

**Sales and technical support
to Africa, Europe, Asia,
the Americas, Australia
and the Pacific**

**Technical Support
Operating Times**

Monday to Friday
08h00 to 16h30 GMT+2,

Saturdays
08h00 to 14h00 GMT+2

Centurion Systems (Pty) Ltd reserves the right to make changes to the product described in this manual without notice and without obligation to notify any persons of any such revisions or changes. Additionally, **Centurion Systems (Pty) Ltd** makes no representations or warranties with respect to this manual. No part of this document may be copied, stored in a retrieval system or transmitted in any form or by any means electronic, mechanical, optical or photographic, without the express prior written consent of **Centurion Systems (Pty) Ltd**.



Contents

1. INTRODUCTION	Page 4
1.1. Important Safety Information	Page 4
2. SPECIFICATIONS	Page 5
2.1. Physical Dimensions	Page 5
2.2. Technical Specifications	Page 5
3. PRODUCT IDENTIFICATION	Page 7
4. DEVICE LAYOUT AND WIRED CONNECTIONS	Page 8
5. LCD INTERFACE	Page 9
5.1. Syncing and Factory Reset	Page 10
6. CONFIGURATIONS	Page 11
6.1. Removing the Mounting Plate and Fascia	Page 11
6.1.1. Removing the Mounting Plate	Page 11
6.1.2. Removing the Fascia	Page 11
6.2. Installation	Page 12
6.2.1. Wall Mounting	Page 12
6.2.2. DIN-rail Mounting	Page 12
7. WIRING DIAGRAMS	Page 14
7.1. G-SPEAK ULTRA to 24V Dx Series SMART Controllers	Page 14
7.2. G-SPEAK ULTRA to 12V D5-Evo SMART Controllers	Page 15
7.3. G-SPEAK ULTRA to 12V Vx Series SMART Controllers	Page 16
7.4. G-SPEAK ULTRA to 12V D-Series Controllers	Page 17
7.5. G-SPEAK ULTRA to 12V V-Series Controllers	Page 18
7.6. G-SPEAK ULTRA into an Electric Fence	Page 19
7.7. G-SPEAK ULTRA into an Alarm System	Page 20
7.8. G-SPEAK ULTRA into a Striker Lock	Page 21
7.9. Completing the Installation	Page 22
7.9.1. G-WEB	Page 22
7.9.2. G-WEB Mobile App	Page 22
7.9.3. MyCentsys Remote App	Page 22
8. WARRANTY INFORMATION	Page 23

Icons used in this manual



This icon indicates tips and other information that could be useful during the installation.



This icon denotes variations and other aspects that should be considered during installation.



This icon indicates warning, caution or attention! Please take special note of critical aspects that MUST be adhered to in order to prevent injury.

1. Introduction

Take your security to new heights with the **G-SPEAK ULTRA**. This innovative GSM intercom system allows you to answer your intercom from anywhere in the world, ensuring maximum convenience and peace of mind. By seamlessly integrating wireless GSM technology with a futuristic ULTRA interface, the **G-SPEAK ULTRA** offers wireless communication between you and the intercom gate station. Imagine, your phone becomes the intercom handset, giving you unparalleled control and security.

1.1. Important Safety Information

CAREFULLY READ AND FOLLOW ALL INSTRUCTIONS before installing the product.

- Do not install this product near DOSS sensor inside gate motor housing or near the remote receiver
- Do not install this product near any sensitive electrical components
- All installation, repair, and service work to this product must be done by a suitably qualified person
- Do not in any way modify the components of the system
- Do not install the equipment in an explosive atmosphere: the presence of flammable gas or fumes is a serious danger to safety
- Do not leave packing materials (plastic, polystyrene, etc.) within reach of children as such materials are potential sources of danger
- Dispose of all waste products like packing materials, according to local regulations.
- Centurion Systems (Pty) Ltd does not accept any liability caused by improper use of the product, or for use other than that for which the automated system was intended
- This product was designed and built strictly for the use indicated in this documentation. Any other use, not expressly indicated here, could compromise the service life/operation of the product and/or be a source of danger
- Anything not expressly specified in these instructions is not permitted.

2. Specifications

2.1. Physical Dimensions



FIGURE 1. G-SPEAK ULTRA PHYSICAL DIMENSIONS

2.2. Technical Specifications

Supply Voltage Range	11-24V DC	
Maximum current draw	300mA @ 12V DC	
Input/output current rating	50mA (Open Collector)	
Input sense voltage range	0-24V DC (0-1.6V Low-input State, 5V-24V High-input State)	
SIM Card	Nano-format e-SIM (South Africa Only)	
Number of configurable Input/Output channels	4	
Call Buttons on Calling Module	Metal Gate Station	Plastic Gate Station
	1, 2 and 4 buttons	2 buttons
Call confirmation at Calling Module	Yes	
Memory capacity	• 5000 Event logs • 20 Access Profiles • 1 Custom Welcome SMS Message for New Access Numbers • 20 Custom Output Activation SMS Messages (From User to Device) • 30 Custom Input Notification SMS/Email Messages (From Device to User)	

TABLE 1

2.2. Technical Specifications Continued

Memory capacity (continued)	• 100 Visitor Time-barring Windows (Windows are the periods between two dates) • 30 Generic Time-barring Windows (Windows are weekly recurring) • 10 Output Activation Schedules (Schedules are weekly recurring) • 3 Daylight Saving Periods • 4 Input to Output Mapping Configurations		
Frequency bands	LTE-FDD	B1/B3/B5/B7/B8/B20/B28#	
	LTE-TDD	N/A	
	GSM	GSM/GPRS/EDGE 900/1800Mhz	
Network modes	4G will be used whenever possible, 2G will be used only as a fallback ¹		
Antenna	Internal GSM antenna with option to connect external for sites that so require. For Australia and New Zealand only: Requires either Standard Antenna (WH-GHQ918D) or High-performance Antenna (WH-GSM05SMA2)		
Operating temperature range	-40°C to +85°C		
Degree of protection	G-SPEAK ULTRA	Metal Gate Station	Plastic Gate Station
	IP40	IP54 ²	IP52
Mass of unit packed	155g		
Packaging dimensions	80mm wide x 118mm deep x 38mm high		

TABLE 1 CONTINUED

1. No 2G network in Australia, limited 2G in New Zealand.
2. A Gooseneck backing plate is required when mounting onto a Gooseneck, to maintain IP rating.

3. Product Identification

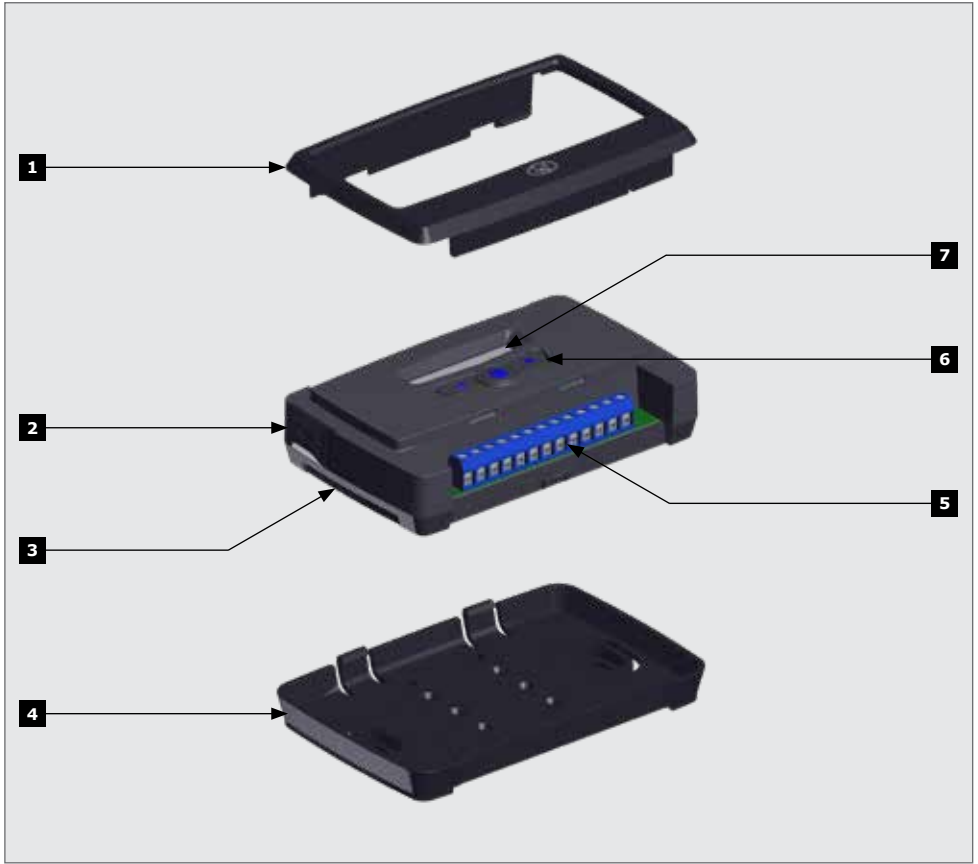


FIGURE 2. PRODUCT IDENTIFICATION

- | | |
|-----------------------------------|---------------------|
| 1. Fascia | 5. Terminal Blocks |
| 2. External Antenna Cover | 6. Navigation Panel |
| 3. Main G-SPEAK ULTRA unit | 7. LCD Screen |
| 4. Mounting Plate | |

4. Device Layout and Wired Connections

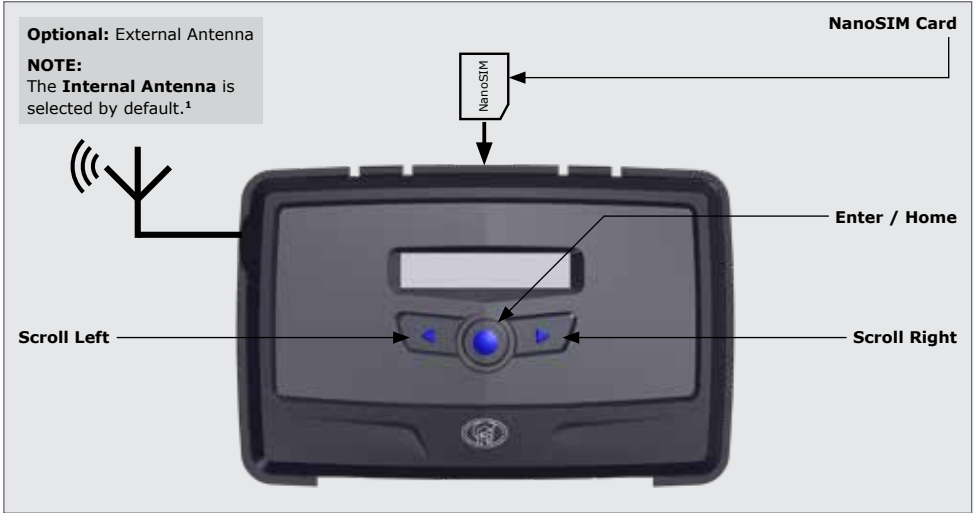


FIGURE 3. DEVICE LAYOUT

1. **For Australia and New Zealand only:**
Requires either Standard Antenna (WH-GHQ918D) or High-performance Antenna (WH-GSM05SMA2)



FIGURE 4. WIRED CONNECTIONS

GND	Ground
IO1	Input / Output 1 (Default: Output)
IO2	Input / Output 2 (Default: Output)
IO3	Input / Output 3 (Default: Output)
IO4	Input / Output 4 / Gate Status Input (Default: Output)
P1	Positive
P2	Negative
P3	Speaker
P4	Speaker
P5	Mic
P6	Mic
+	Positive of Power Supply 12-24VDC
-	Negative of Power Supply

TABLE 2

5. LCD Interface




	Home Screen Network Name or Phone Number Applicable to Incoming / Outgoing SMS or Call. - Network Signal Strength - Connected to Internet - Connected to G-WEB - Device has Error Condition - Incoming SMS - Outgoing SMS - Incoming Phone Call Events - Outgoing Phone Call Events
	IO Status Screen - Input: Deactivated ("E" = Input event reached) - Input: Activated (pulled to ground) ("E" = Input event reached) - Output: Off - Output: On (pulling to ground)
	Voltage/Firmware/Date & Time Screen • Supply Voltage • Time • Firmware Version • Date
	Phone Number Screen Device SIM Phone Number.
	Airtime Balance Screen - Outgoing Call Credits - Outgoing SMS Credits
	GSM Antenna Selected Screen - Internal GSM Antenna Selected (default). - External GSM Antenna Selected (connect own Antenna to SMA connector). - Press Enter to change between Internal and External Antennas.
	Gate Status Screen - Gate Closed - Gate Opening - Gate Open - Gate Status Warning

TABLE 3

	SIM Screen SIM PIN ✓ SIM PIN OK SIM PIN ✗ SIM PIN Incorrect ✗ SIM Error
	IMEI Screen Displays the device's IMEI number
	Gate Station Voice Numbers Displays the primary and secondary Voice Numbers allocated to their respective buttons

TABLE 3 CONTINUED

5.1. Syncing and Factory Reset

	From the main menu, scroll left using the direction buttons until " Device Reset " shows on the screen. Press the enter/home button to enter the sub-menus.
	Re-sync (sub-menu) Re-sync will refresh the connection of the device to G-WEB, and will not erase any settings. Push the enter/home button to confirm a re-sync, if the current settings are still desired.
	Factory Reset¹ (sub-menu) Factory reset will restore the device to factory settings. Press the enter/home button to confirm a factory reset. WARNING! This will erase all settings, and restore the device to its original factory state!
	Back (sub-menu) Press enter/home button to return to main menu.
	Confirmation screen Confirm or decline proceeding with factory defaulting.

1. Factory Reset can only be done when the device has a GWEB Connection.

TABLE 4

6. Configurations

6.1. Removing the Mounting Plate and Fascia

6.1.1. Removing the Mounting Plate

Gently pull the two clips at the back, backward to release the main **G-SPEAK ULTRA** unit, and lift the unit out of the mounting plate.

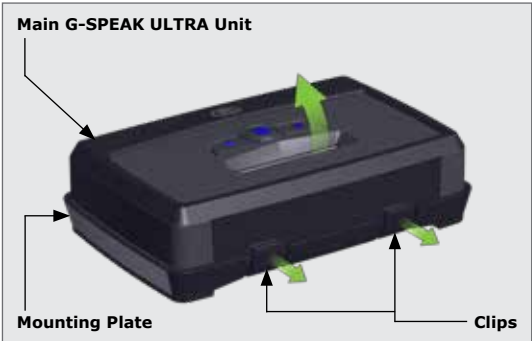


FIGURE 5

6.1.2. Removing the Fascia

The fascia can be removed by inserting the tips of one's fingers into the slots (as shown in Figures 4 and 5), and pulling outward and upward.

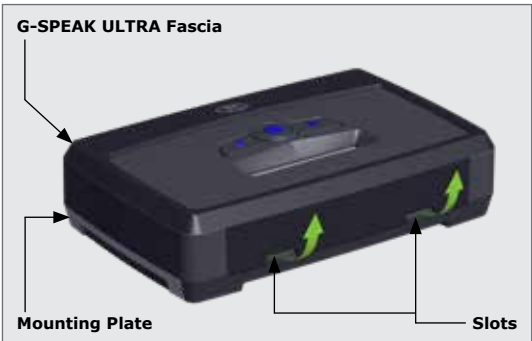


FIGURE 6

The fascia should pop off without effort.

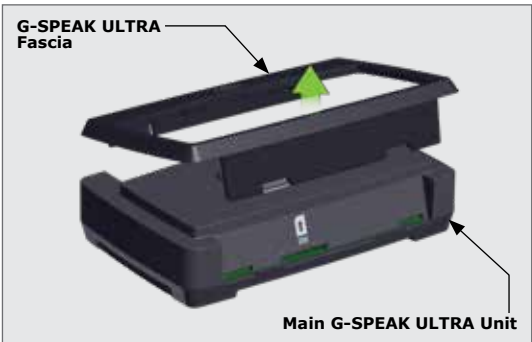


FIGURE 7



Reverse the procedure under Section 6.1 to re-assemble the **G-SPEAK ULTRA**.

6.2. Installation

6.2.1. Wall Mounting

The Mounting Plate is used to mount the **G-SPEAK ULTRA** device to a wall. Use four screws with wall anchors (not supplied) to secure Mounting Plate.

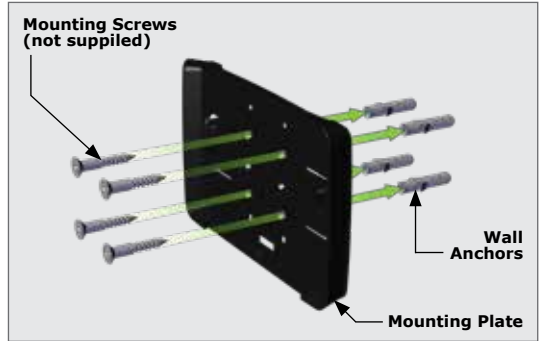


FIGURE 8

Clip the **G-SPEAK ULTRA** main unit into the Mounting plate after it has been secured to the wall; a 'click' will be heard if done correctly.

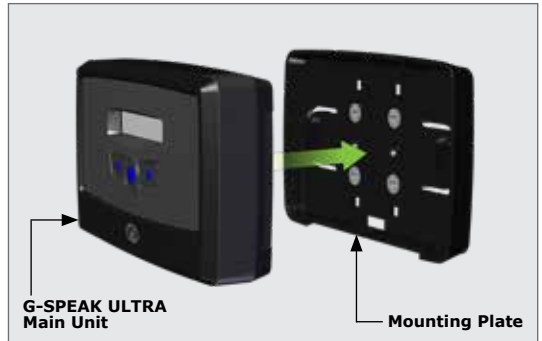


FIGURE 9

6.2.2. DIN-Rail Mounting

Should the **G-SPEAK ULTRA** need to be mounted onto a DIN-rail, a DIN-rail mounting kit is available. Ask at Centurion Systems (Pty) Ltd for more information.

Secure the DIN-rail clips to the back of the mounting plate using four (4) screws.

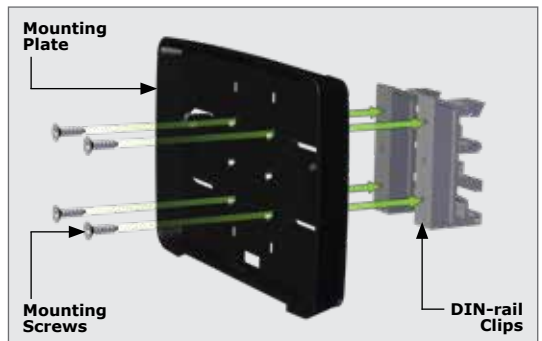


FIGURE 10

Position the bottom of the DIN-rail clips onto the rail, and clip the top end into position(A). A 'click' will be heard if it has been done correctly(B).

Clip the **G-SPEAK ULTRA** main unit into the Mounting plate after it has been secured to the wall; another 'click' will be heard if done correctly.

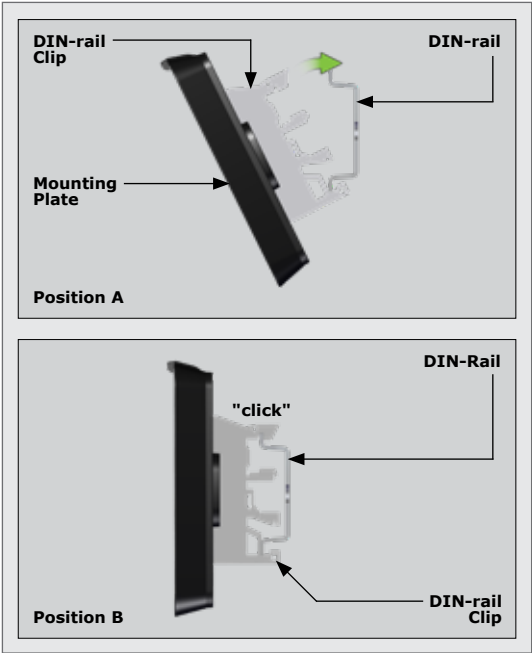


FIGURE 11

To remove the unit from the DIN-rail, remove the **G-SPEAK ULTRA** main unit from the mounting plate as described in Section 6.1. Insert a small flat screwdriver into the hole(s) shown in Figure 12, and gently pry the clips from the rail.

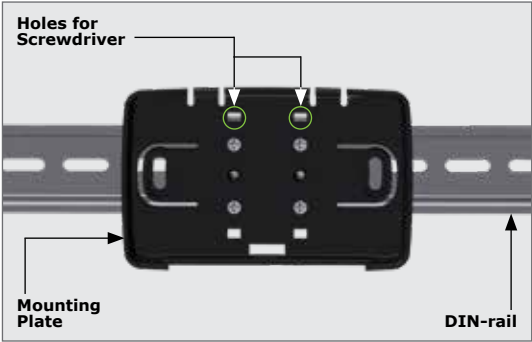


FIGURE 12

7.1. G-SPEAK ULTRA to 24V Dx Series SMART Controllers



Possible Notifications

- Gate Open / Closed
- Gate Opening / Closing
- Gate Standing Open
- Mains Failure
- Battery Low
- Multiple Collisions

Dx SMART Controller

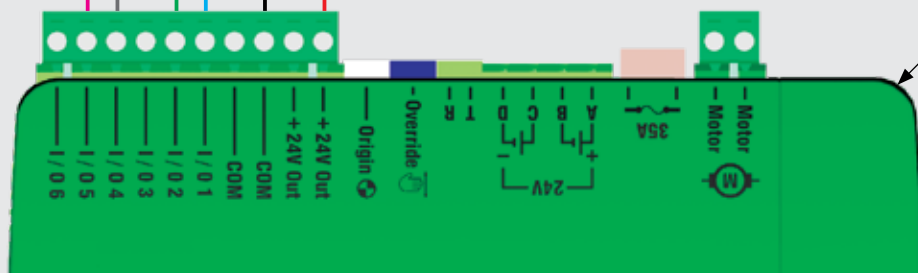


FIGURE 13

Configurations in MyCentsys Pro Mobile Application;



TRG (IO1),
PED (IO2),
GATE STATUS (IO4), or
FRX (IO5)

7.2. G-SPEAK ULTRA to 12V D5-Evo SMART Controller

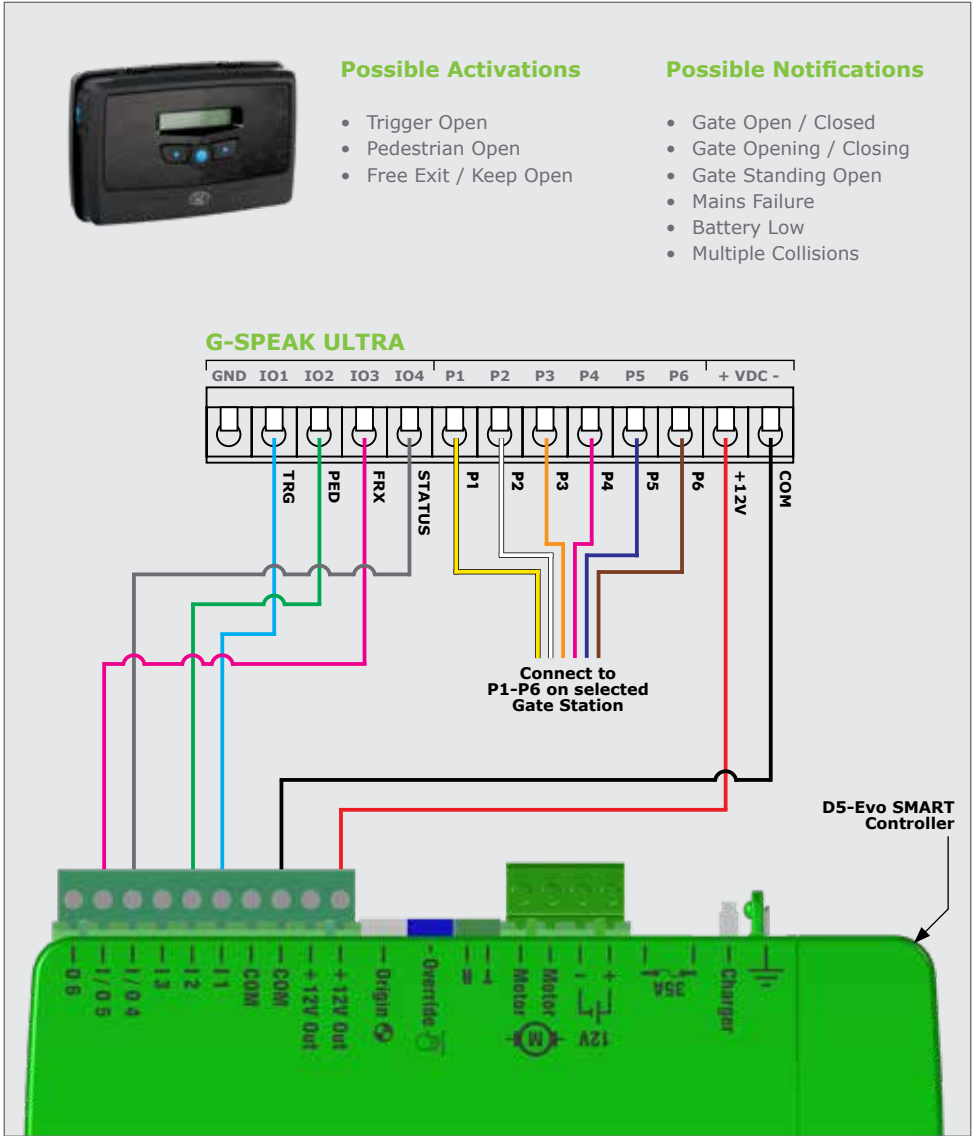


FIGURE 14

Configurations in MyCentsys Pro Mobile Application;



TRG (I1),
PED (I2),
GATE STATUS (IO4), or
FRX (IO5)

7.3. G-SPEAK ULTRA to 12V Vx Series SMART Controllers

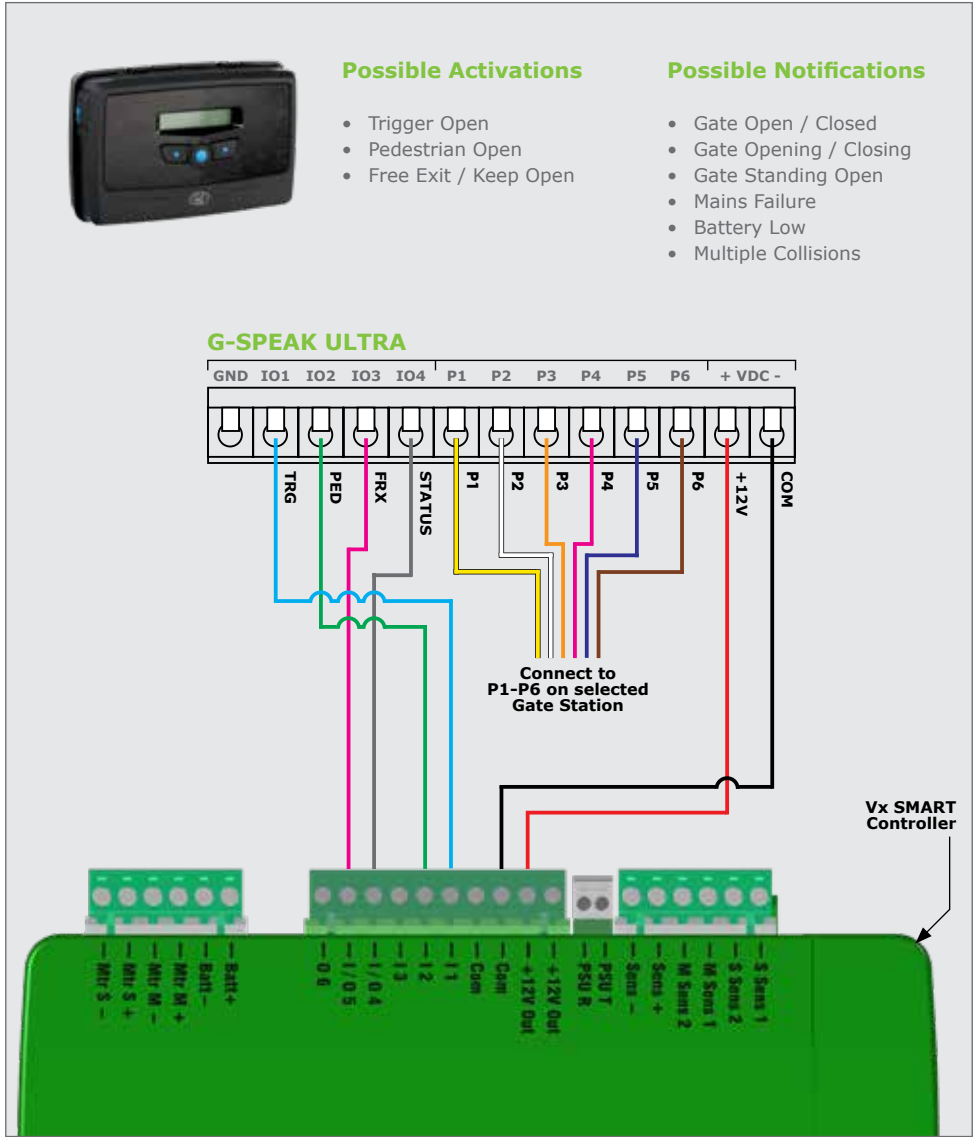


FIGURE 15



Configurations in MyCentsys Pro Mobile Application;
TRG (I1),
PED (I2),
GATE STATUS (IO4), or
FRX (IO5)

7.4. G-SPEAK ULTRA to 12V D-Series Controllers





Possible Activations

- Trigger Open
- Pedestrian Open
- Free Exit / Keep Open

Possible Notifications

- Gate Open / Closed
- Gate Opening / Closing
- Gate Standing Open
- Mains Failure
- Battery Low
- Multiple Collisions

G-SPEAK ULTRA

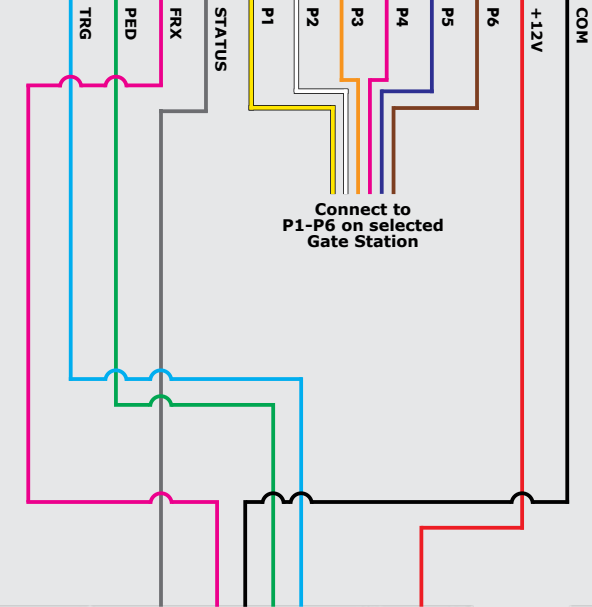

Connect to
P1-P6 on selected
Gate Station

D-Series
Controller

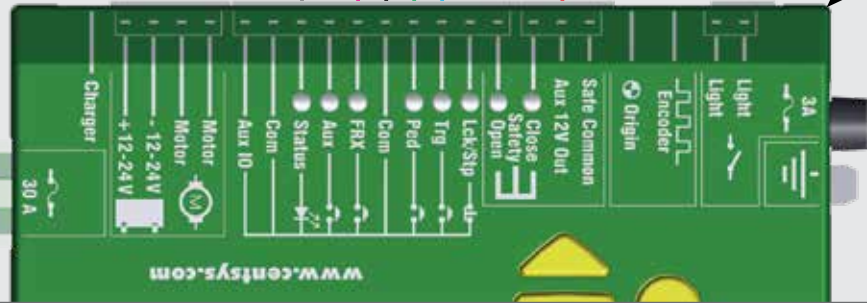


FIGURE 16

7.5. G-SPEAK ULTRA to 12V V-Series Controllers




Possible Activations

- Trigger Open
- Pedestrian Open
- Free Exit / Keep Open

Possible Notifications

- Gate Open / Closed
- Gate Opening / Closing
- Gate Standing Open
- Mains Failure
- Battery Low
- Multiple Collisions

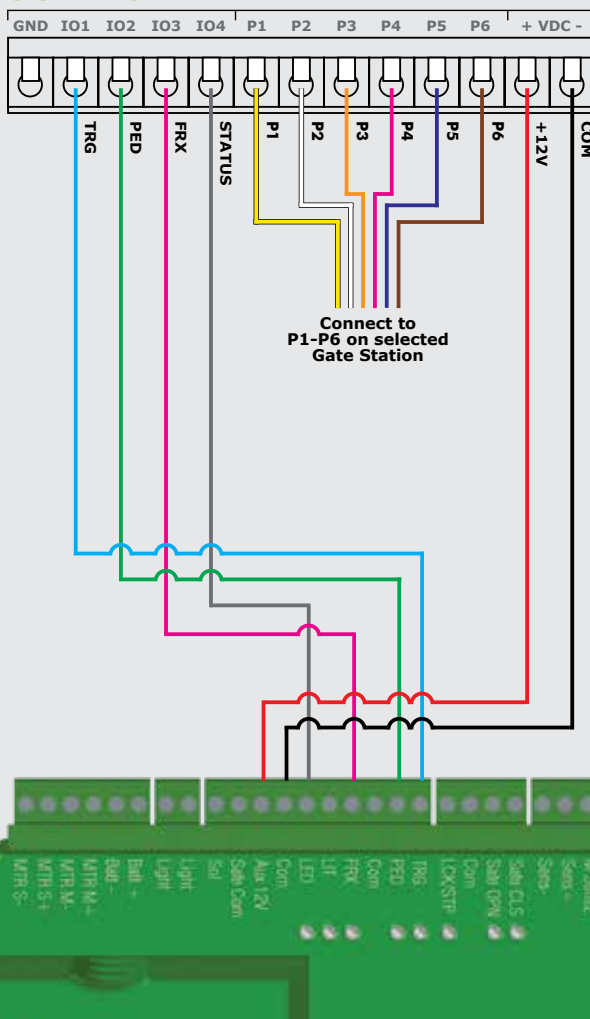

V-Series Controller


FIGURE 17

7.6. G-SPEAK ULTRA into an Electric Fence Controller



Possible Notifications

- Arm Status
- Alarm Notifications

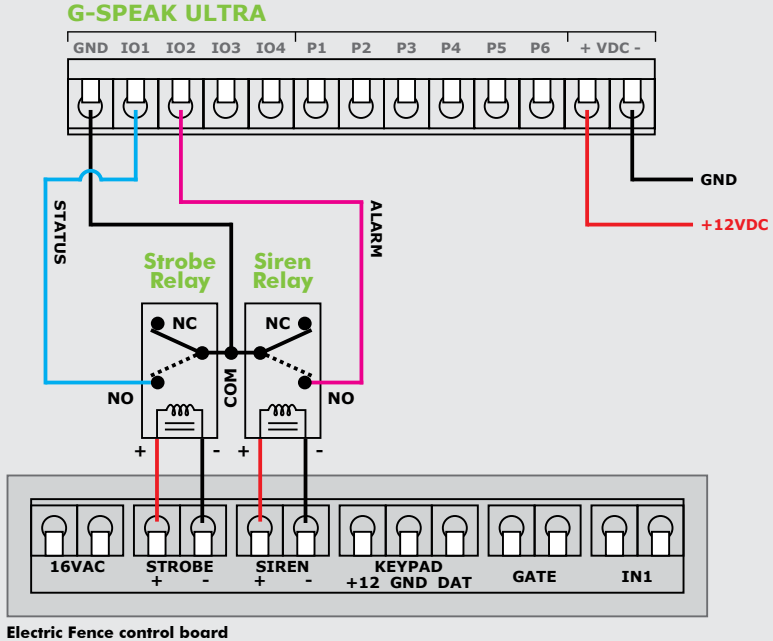

To program the Strobe to Status:

JVA Keypad, Press:

1. "INSTALLER PIN"*0#
2. 2202#
3. *#

Nemtek Keypad, Press:

1. "INSTALLER PIN"*0#
2. 101# **OR** 0011# (Model Dependant)
3. *#

FIGURE 18




- The Status and alarm inputs must have three seconds filter time configured on the **G-SPEAK ULTRA**
- The strobe output on the energiser needs to be programmed for the armed status notification to be sent via the **G-SPEAK ULTRA**

7.7. G-SPEAK ULTRA into an Alarm System



Possible Notifications

- Arm Status
- Intruder / Siren

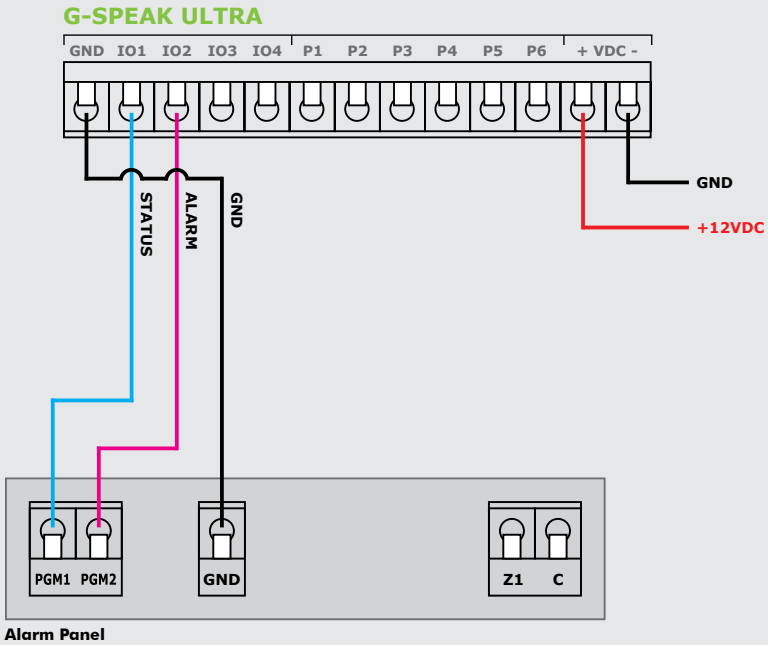

Alarm programming:

PGM1: Armed Status
PGM2: Siren Follow

FIGURE 19



The Alarm Panel PGMs must activate to "GND". However, if the Alarm Panel only supports positive activations, then relays must be used between the Alarm Panel and the **G-SPEAK ULTRA** to change the activation to "GND".

7.8. G-SPEAK ULTRA into a Striker Lock

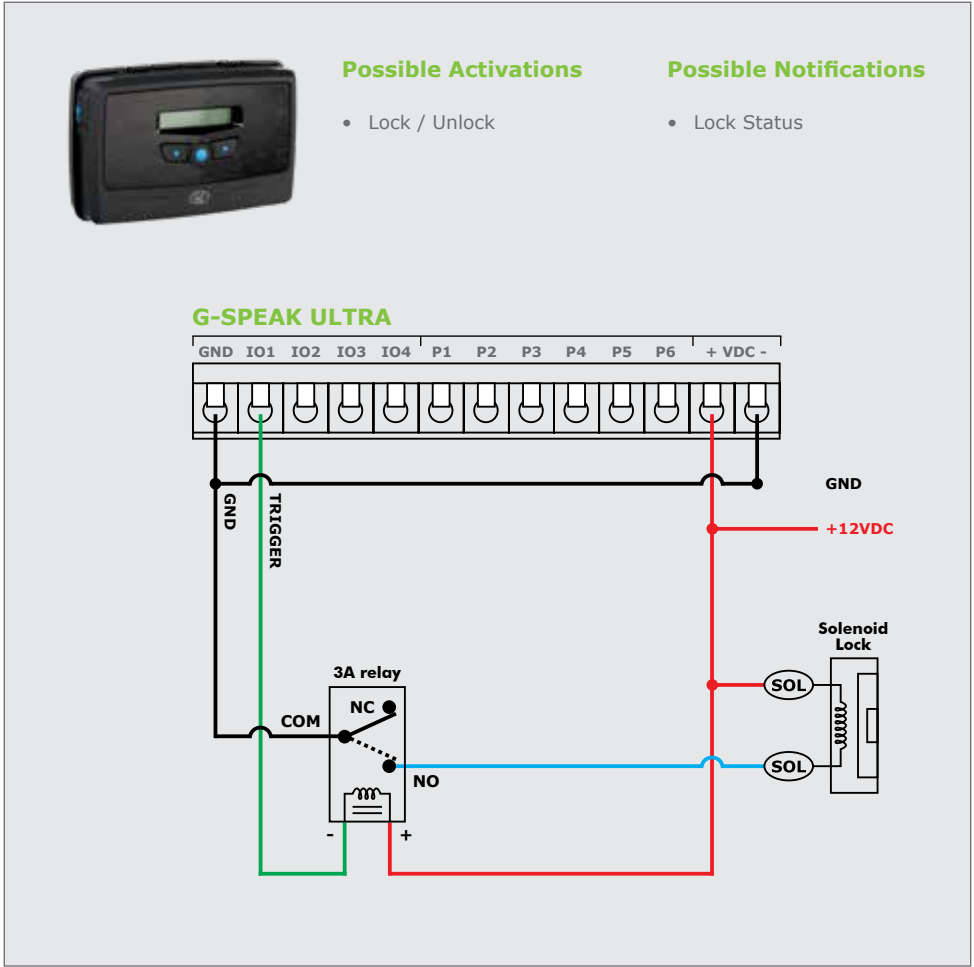


FIGURE 20

7.9. Completing the Installation

7.9.1. G-WEB

All features – both basic and advanced – can be easily, and remotely, configured via the G-WEB online interface. By simply logging into G-WEB using any Internet-enabled device, one can add and delete devices, specify text for input and output notifications and activations, modify device characteristics and a plethora of other features, all from the comfort of one's home or office. Note that it will be necessary to register if you have not previously done so.

1. Complete the wiring of the unit as per Section 4 and 7 of this document.
2. Power up the device and verify that the device connects to the G-WEB platform by referring to the LCD home screen.
3. Navigate your Internet browser to <http://www.gweb.co.za> (or www.g-web.com.au for Australia and New Zealand) and login to your existing profile or, alternatively, register a new profile.
4. On the My Devices page, select Add New **G-SPEAK ULTRA** Device and follow the onscreen instructions to associate the device to your profile.
5. Configure the device with the desired settings using your online portal.

7.9.2. G-WEB Mobile App

To download the G-WEB Mobile installer app, simply scan the QR code on your mobile device to be taken to the SMART mobile website.

The G-WEB app gives you on-the-go access to a multitude of configuration and admin settings.



FIGURE 21

Quick Add:

To instantly associate a device to your online profile, scan the QR code using your mobile phone or any universal QR scanner mobile application (Figure 21). Note that the G-WEB Mobile app has a built in QR scanner.



7.9.3. MyCENTSYS Remote

Download the MyCentsys Remote mobile app now for free by scanning the QR code on your mobile device. MyCentsys Remote lets you remotely control your GSM devices from your phone and receive push notifications for systems that are being monitored.



FIGURE 22

9. Warranty Information

All of our products are manufactured with extreme care, thoroughly inspected and tested.

The goods supplied by us shall be subject to the provisions of sections 55 to 57 of the Consumer Protection Act (68/2008) except where the provisions of the warranty contained in our product documentation are more favourable to the purchaser.

Subject to the warranty contained in our product documentation, if applicable, our products are warranted for a period of twenty-four months after delivery.

However, it is expressly noted that batteries carry a six month warranty due to the nature of these products being such that they are subject to possible misuse. Please note that warranties will be honoured on a carry-in basis; in other words, the product in question must be taken in to one of our branches, or to the authorised reseller that the product was purchased from, for assessment and, if necessary, repair. For equipment not of our manufacture, the warranty as supplied by the original manufacturer will apply if such warranty is more favourable to the purchaser than the relevant provisions of the Consumer Protection Act (Act 68/2008 of South Africa), or any other applicable law as so required in different countries in which the product was sold.

Such warranty is valid only once full payment has been received for such goods.

Australian customers:

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure

Any warranty may be voidable on any equipment which:

1. Has not been installed in accordance with the installation instructions provided.
2. Has been subject to misuse or which has been used for any purpose other than that designed for by the manufacturers.
3. Has damage caused as a result of handling during transit, atmospheric conditions (including lightning), corrosion of metal parts, insect infestation, power surges or other forces outside of the control of the manufacturer.
4. Has been repaired by any workshop and / or person NOT previously authorised by the manufacturer.
5. Has been repaired with components not previously tested, passed or authorised by Centurion Systems (Pty) Ltd, South Africa or one of its subsidiary companies.



Connect with us on:

International Customers

@CenturionSystemsRSA

@Centurion.Systems

@Centurion-Systems

@CenturionSystems

@Centurion.Systems

@AskCenturion

@Centurion.Systems

Centurion-Systems



Australian Customers

FAACTechnologiesAustralia

@faac_technologies_australia

FAACTechnologiesAustralia

@FAACTechnologiesAustralia

Subscribe to the newsletter:

www.centsys.com/subscribe

WhatsApp - Technical Support

South Africa:

+27 (0)83 650 4010

International:

+27 (0)83 650 4244

Monday to Friday:

from 08h00 to 16h30 (GMT+2)

Saturday:

from 08h00 to 14h00 (GMT+2)

Call:

1300 322 228 (FAAC Australia)

Email:

sales.au@faactechnologies.com

Technical Support Email:

technical.au@faactechnologies.com

E&OE Centurion Systems (Pty) Ltd reserves the right to change any product without prior notice

All product and brand names in this document that are accompanied by the ® symbol are registered trademarks in South Africa and/or other countries, in favour of Centurion Systems (Pty) Ltd, South Africa.

The CENTURION and CENTSYS logos, all product and brand names in this document that are accompanied by the TM symbol are trademarks of Centurion Systems (Pty) Ltd, in South Africa and other territories; all rights are reserved.

We invite you to contact us for further details.



Doc number: 1265.D.01.0004_21092026

www.centsys.com